



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

*Priority
Hick
12/01*

jc857 U.S. PTO
09/972577



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00204632.4

Der Präsident des Europäischen Patentamts:
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

24/08/01





Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr
Application no
Demande n° 00204632.4

Anmeldetag
Date of filing
Date de dépôt 18/12/00

Anmelder
Applicant(s)
Demandeur(s)
Koninklijke Philips Electronics N.V.
5621 BA Eindhoven
NETHERLANDS

Bezeichnung der Erfindung
Title of the invention
Titre de l'invention
Fan protection

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat
State
Pays

Tag
Date
Date

Aktenzeichen
File no
Numéro de dépôt

Internationale Patentklassifikation
International Patent classification
Classification internationale des brevets
/

Am Anmeldetag benannte Vertragsstaaten
Contracting states designated at date of filing AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR
Etats contractants désignés lors du dépôt

Bemerkungen
Remarks
Remarques



1

EPO - DG 1

14.12.2000

Fan protection.

18.12.2000



The invention relates to a protection circuit for a plurality of fans, a cooling system comprising such a protection circuit, and a display apparatus comprising such a cooling system.

5

JP-A-61-15594 discloses fans which each are connected to an operating voltage via a series arrangement of a current sensor and a breaker. A comparison calculator compares the actual fan currents as measured by the current sensors with a normal operating current. If the difference exceeds a prescribed allowable level, the corresponding breaker is opened. It is a drawback of this fan protection device that a conductive line is required from each current sensor to the comparison calculator to provide the actual fan currents.

15 It is an object of the invention to provide a protection circuit for a plurality of fans wherein the number of conductive lines required to provide the actual operating status of the fans to a detection circuit does not depend on the number of fans.

To this end, a first aspect of the invention provides a protection circuit for a plurality of fans as claimed in claim 1. A second aspect of the invention provides a cooling system as claimed in claim 5. A third aspect of the invention provides a display apparatus as claimed in claim 6. Advantageous embodiments of the invention are claimed in the dependent claims.

25 In the protection circuit for a plurality of fans in accordance with the first aspect of the invention, with each fan a corresponding fan operation condition indicating circuit (further referred to as the element or elements) is associated. Each element has a property with a value which indicates whether the corresponding fan is operating normally or abnormally.

The elements are arranged in parallel between two conductive lines. The detection circuit determines the total value of the properties of parallel arranged elements. If the total value is not within a predetermined range which indicates that all the fans are

operating normally, at least one of the fans functions abnormally. The number of lines required to convey the operation status of the fans to the detection circuit is only two and does not depend on the number of fans involved.

It is a further advantage of the protection circuit in accordance with the invention that the total value may indicate how many fans are not functioning well. For example, if six fans are used, it may be decided to take action only if two or more fans are operating abnormally. In the prior art all fans will be switched off when a single fan operates abnormally.

JP-A-2-230411 discloses a system for detecting fan abnormality wherein a fuse opens when the corresponding fan operates abnormally. All the fuses are arranged in series. One end of the series arrangement is connected to an input of a detector. A pull up resistor is connected to the input the detector. If one of the fans operates abnormally, the corresponding fuse opens the series chain of fuses and the input will be pulled to a high voltage by the pull up resistor. This prior art does not disclose a parallel arrangement of the elements, and the detection circuit does not check the value of the properties of the parallel arranged elements. Further, this prior art is unable to detect how many fans are functioning abnormally as it can not distinguished whether a single or more fans are operating abnormally.

In an embodiment of the invention as claimed in claim 2, the element comprises a current source which supplies a current depending on the operation condition of the corresponding fan. The total current caused by the parallel arranged current sources may be measured directly or may be converted into a voltage via a common impedance connected to the protection line. The measured current or voltage can be used to determine whether one or more fans is or are inoperative. For example, let it be assumed that the current sources do not supply current as long as the fans are operating normally, and each of the current sources produce a predetermined amount of current if a corresponding fan is operating abnormally. The number of times that the predetermined amount of current appears in the total current indicates the number of fans that are inoperative.

In an embodiment of the invention as claimed in claim 3, the current determining element comprises an impedance element of which the impedance value depends on the operation condition of the corresponding fan. The detection circuit determines the total impedance of the parallel arranged impedance elements. If the total impedance is not within a predetermined range which indicates that all the fans are operating normally, at least one of the fans functions abnormally.

In an embodiment of the invention as claimed in claim 4, the impedance element comprises an impedance in series with a switch to decrease the tolerance of the measured impedance.

5 These and other aspects of the invention will become apparent from and will be elucidated with reference to the embodiments described hereinafter.

In the drawings:

Fig. 1 shows a circuit diagram of an embodiment of the invention,

10 Fig. 2 shows an embodiment of a detection circuit in accordance with the invention, and

Fig. 3 shows a circuit diagram of an embodiment of a fan unit of the invention.

Fig. 1 shows a circuit diagram of an embodiment of the invention. The shown
15 fan units $F1$ to F_n each comprise a fan motor M_i and an electronic circuit FM_i to produce a signal Is_i indicating whether the fan motor M_i operates normally or abnormally. This signal Is_i controls an impedance value of an impedance Z_i . Or, as shown in Fig. 3, the signal Is_i controls a current of a current source I_i . A power supply 1 supplies a power supply voltage V_s via a common line to the N fan units $F1$ to F_n . The power supply current is returned via a
20 common ground line GND. Each of the fan units F_i comprises an impedance element Z_i which has an impedance value dependent on the operating condition of the corresponding fan F_i . The impedance elements Z_i ($Z1$ to Z_n) are arranged between a common protection line PROT and the common ground line GND. A detector 2 is connected to the common protection line PROT and the common ground line GND to detect the total impedance of the
25 parallel arranged impedance elements $Z1$ to Z_n . The detector 2 supplies a protection signal FPR which depends on the total impedance of the parallel arranged impedance elements $Z1$ to Z_n . This total impedance is indicative for the operation condition of the fans F_i .

For example, the impedance of an impedance element Z_i associated with the fan F_i is within a first range when the fan F_i is operating normally, and the impedance is in a
30 second range which is disjunct with the first range when the fan F_i is operating abnormally. In a preferred embodiment, as shown in Fig. 1, the impedance element Z_i comprises a series arrangement of an impedance R_i (preferably a resistor) and a main current path of an electronic switch S_i (preferably a FET). A control input of the electronic switch S_i receives the signal Is_i indicating the operating condition of the fan F_i as an input signal. In the

example shown in Fig. 1, the control input receives a pulse signal I_{si} when the fan Fi is rotating. If the fan Fi stops rotating the electronic switch Si becomes conductive or non-conductive continuously. The average impedance value of the impedance element Z_i depends on the duty cycle of the pulse applied to the control input. Thus, the impedance value is lower or higher, respectively, when the fan Fi is inoperative than when the fan Fi is operative.

A lot of alternative embodiments are possible, the impedance element Z_i may comprise a series arrangement of two impedance's and a switch in parallel with one of the impedance's. When the fan Fi operates normally, the impedance of the impedance element Z_i is determined by the series arrangement of both impedances, when the fan Fi operates abnormally, the impedance of the impedance element Z_i is determined by one of the impedances only, or the other way around.

The protection signal FPR may be supplied to the power supply 1 to switch off the power supply 1 if one, or more than a predetermined number of fans Fi operates abnormally. If the fans Fi are used to cool a display apparatus which comprises processing circuitry 3 to process an input video signal VI to be displayed on a display device 4, the power supply voltages $VB1$ and $VB2$ supplied to the processing circuitry 3 and the display device 4, respectively, will become absent if one, or more than the predetermined number of fans Fi operates abnormally. It is also possible to selectively switch off only circuits of the display apparatus which substantially contribute to the heating of the display apparatus. For example, the audio amplifiers may be switched off. Or the amount of light produced by the display device may be decreased. The action to be taken to lower the dissipation in the interior of the display apparatus may be dependent on the number of fans that are operating abnormally. This might be controlled by a micro processor which receives a signal representative for the total impedance of the parallel arranged impedances or the total current of the parallel arranged current sources and switches off the relevant circuits, or limits the dissipation by limiting the audio output power and/or the light output of the display device. The signal received by the micro processor might be obtained by an analog to digital converter.

Fig. 2 shows an embodiment of a detection circuit or detector 2 in accordance with the invention.

The detector 2 has an input terminal P_i connected to the common protection line PROT, an output terminal P_o to supply the output signal FPR, a terminal P_2 connected to ground, and a terminal P_1 to receive a power supply voltage V_s .

A first comparator COM1 has a non-inverting input, an inverting input connected to the input terminal P_i , and an output connected to the output terminal P_o . A second comparator COM2 has a non-inverting input, an inverting input connected to the input terminal P_i , and an output connected to the output terminal P_o . A resistor R1 is
5 connected between the input terminal P_i and the terminal P1. A capacitor C1 is connected between the input terminal P_i and the terminal P2. A resistor R2 is connected between the terminal P1 and the non-inverting input of the comparator COM1. A resistor R3 is connected between the non-inverting input of the comparator COM1 and the inverting input of the comparator COM2. A resistor R4 is connected between the inverting input of the comparator
10 COM2 and the terminal P2. A resistor R5 is connected between the terminal P1 and the output terminal P_o .

The operation of the detector 2 is described in the now following. The input voltage V_i at the input terminal P_i of the detector 2 is smoothened by the capacitor C1, and may be determined by the total impedance of the parallel-arranged impedance elements Z_i or
15 by the parallel arranged current sources I_i . If the input voltage V_i is lower than the reference voltage V_{ref2} at the inverting input of the second comparator COM2, the second comparator forces the output signal FPR to a low level. If the input voltage V_i is higher than the reference voltage V_{ref1} at the non-inverting input of the comparator COM1, the output signal FPR is forced to the low level by the output of this comparator COM1. If the input voltage V_i
20 is in a range between the reference voltage V_{ref1} and the reference voltage V_{ref2} , none of the comparators COM1 and COM2 will force the output signal FPR low, and consequently, the resistor R5 causes the output signal FPR to be at a high level (the outputs of the comparators COM1 and COM2 are open collectors).

Thus, when the total impedance value of the parallel-arranged impedance
25 elements Z_i , or the total current of the parallel arranged current sources I_i is in a range in which the input voltage V_i is in-between the reference voltages V_{ref1} and V_{ref2} , the fans operate normally which is indicated by a high level of the output signal FPR. If one or more of the fans operates abnormally, this total impedance will have a value such that the input voltage V_i is not within this range between the reference voltages V_{ref1} and V_{ref2} , and the
30 output signal FPR has a low level. It is possible to select the reference levels such that is detected that more than a predetermined number of fans is operating abnormally.

It is also possible to determine the total impedance value of the parallel arranged impedance elements Z_1 to Z_n by measuring a voltage across the total impedance in response to an applied predetermined current.

Fig. 3 shows a circuit diagram of an embodiment of a fan unit F_i of the invention. The shown fan unit F_i comprises a fan motor M_i and an electronic circuit F_{mi} for retrieving a signal I_{si} indicating whether the fan motor M_i operates normally or abnormally.

5 This signal I_{si} controls a current source I_i to supply different predetermined currents dependent on the operation condition of the fan motor M_i . The fan unit F_i shown in Fig. 3 may replace the fan units F_1 to F_n shown in Fig. 1. The detection circuit 2 of Fig. 2 may measure the total current generated by the parallel arranged current sources of the fan units F_1 to F_n as a voltage caused across the resistor R_1 . But, the total current may be measured in
10 any other suitable way.

It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims. In the claims, any
15 reference signs placed between parenthesis shall not be construed as limiting the claim. The verb "comprises" and its conjugations do not exclude the presence of other elements or steps than those listed in a claim. The invention can be implemented by means of hardware comprising several distinct elements, and by means of a suitably programmed computer. In the device claim enumerating several means, several of these means can be embodied by one
20 and the same item of hardware.

CLAIMS:

18.12.2000



1. A protection circuit for an apparatus comprising a plurality of fans (F_i), characterized in that:

the protection circuit comprises a plurality of elements (Z_i ; I_i), each element (Z_i , I_i) being associated with a corresponding one of the plurality of fans (F_i) and having a property with a value depending on an operation condition of the corresponding one of said fans (F_i), the elements (Z_i ; I_i) being arranged in parallel between a reference line (GND) and a protection line (PROT), and

a detection circuit (2) coupled to the protection line (PROT) for detecting whether a total value of the parallel arranged elements (Z_i) is in a range indicating that at least one of the fans (F_i) is in an abnormal operation condition to protect overheating of the apparatus.

2. A protection circuit as claimed in claim 1, characterized in that the element (Z_i ; I_i) comprises a current source (I_i) for supplying a current of which the value depends on the operation condition of the corresponding fan (F_i).

3. A protection circuit as claimed in claim 1, characterized in that the element (Z_i ; I_i) comprises an impedance element (Z_i) of which the value depends on the operation condition of the corresponding fan (F_i).

4. A protection circuit as claimed in claim 3, characterized in that the impedance element (Z_i) comprises a series arrangement of a resistor (R_i) and a main current path of an electronic switch (S_i), a control input of the electronic switch (S_i) being coupled to the corresponding fan (F_i) for receiving a signal (I_{si}) indicating whether the fan (F_i) is operative or inoperative.

5. A cooling system comprising a plurality of fans (F_i) and a protection circuit for an apparatus comprising the plurality of fans (F_i), characterized in that the protection circuit comprises:

a plurality of elements ($Z_i; I_i$), each element (Z_i, I_i) being associated with a corresponding one of the plurality of fans (F_i) and having a property with a value depending on an operation condition of the corresponding one of said fans (F_i), the elements ($Z_i; I_i$) being arranged in parallel between a reference line (GND) and a protection line (PROT), and

5 a detection circuit (2) coupled to the protection line (PROT) for detecting whether a total value of the parallel arranged elements (Z_i) is in a range indicating that at least one of the fans (F_i) is in an abnormal operation condition to protect overheating of the apparatus.

10 6. A display apparatus comprising a display device, a plurality of fans for cooling the display apparatus, and a protection circuit, characterized in that the protection circuit comprises:

a plurality of elements ($Z_i; I_i$), each element (Z_i, I_i) being associated with a corresponding one of the plurality of fans (F_i) and having a property with a value depending
15 on an operation condition of the corresponding one of said fans (F_i), the elements ($Z_i; I_i$) being arranged in parallel between a reference line (GND) and a protection line (PROT),

a detection circuit (2) coupled to the protection line (PROT) for detecting whether a total value of the parallel arranged elements (Z_i) is in a range indicating that at least one of the fans (F_i) is in an abnormal operation condition, to protect overheating of the
20 display apparatus.

7. A display apparatus as claimed in claim 6, characterized in that the detection circuit (2) comprises means for selectively limiting the power dissipation in the display apparatus in dependence on a number of fans (F_i) operating abnormally.

25

ABSTRACT:

18.12.2000



In a protection circuit for a plurality of fans, an element is associated with each fan. The impedance or the current value of the element indicates the operating condition of the fan. For example, the impedance or the current value may be low if the fan is operative or functioning normally, and high when the fan is inoperative or functioning abnormally. The elements are arranged in parallel between two conductive lines. A detection circuit determines the total impedance or current value between the two lines. If the total impedance or current is not within a predetermined range which indicates that all the fans are operating normally, at least one of the fans functions abnormally. The number of lines required to convey the operation status of the fans to the detection circuit is only two and does not depend on the number of fans involved.

(Fig. 1)



18. 12. 2000

100

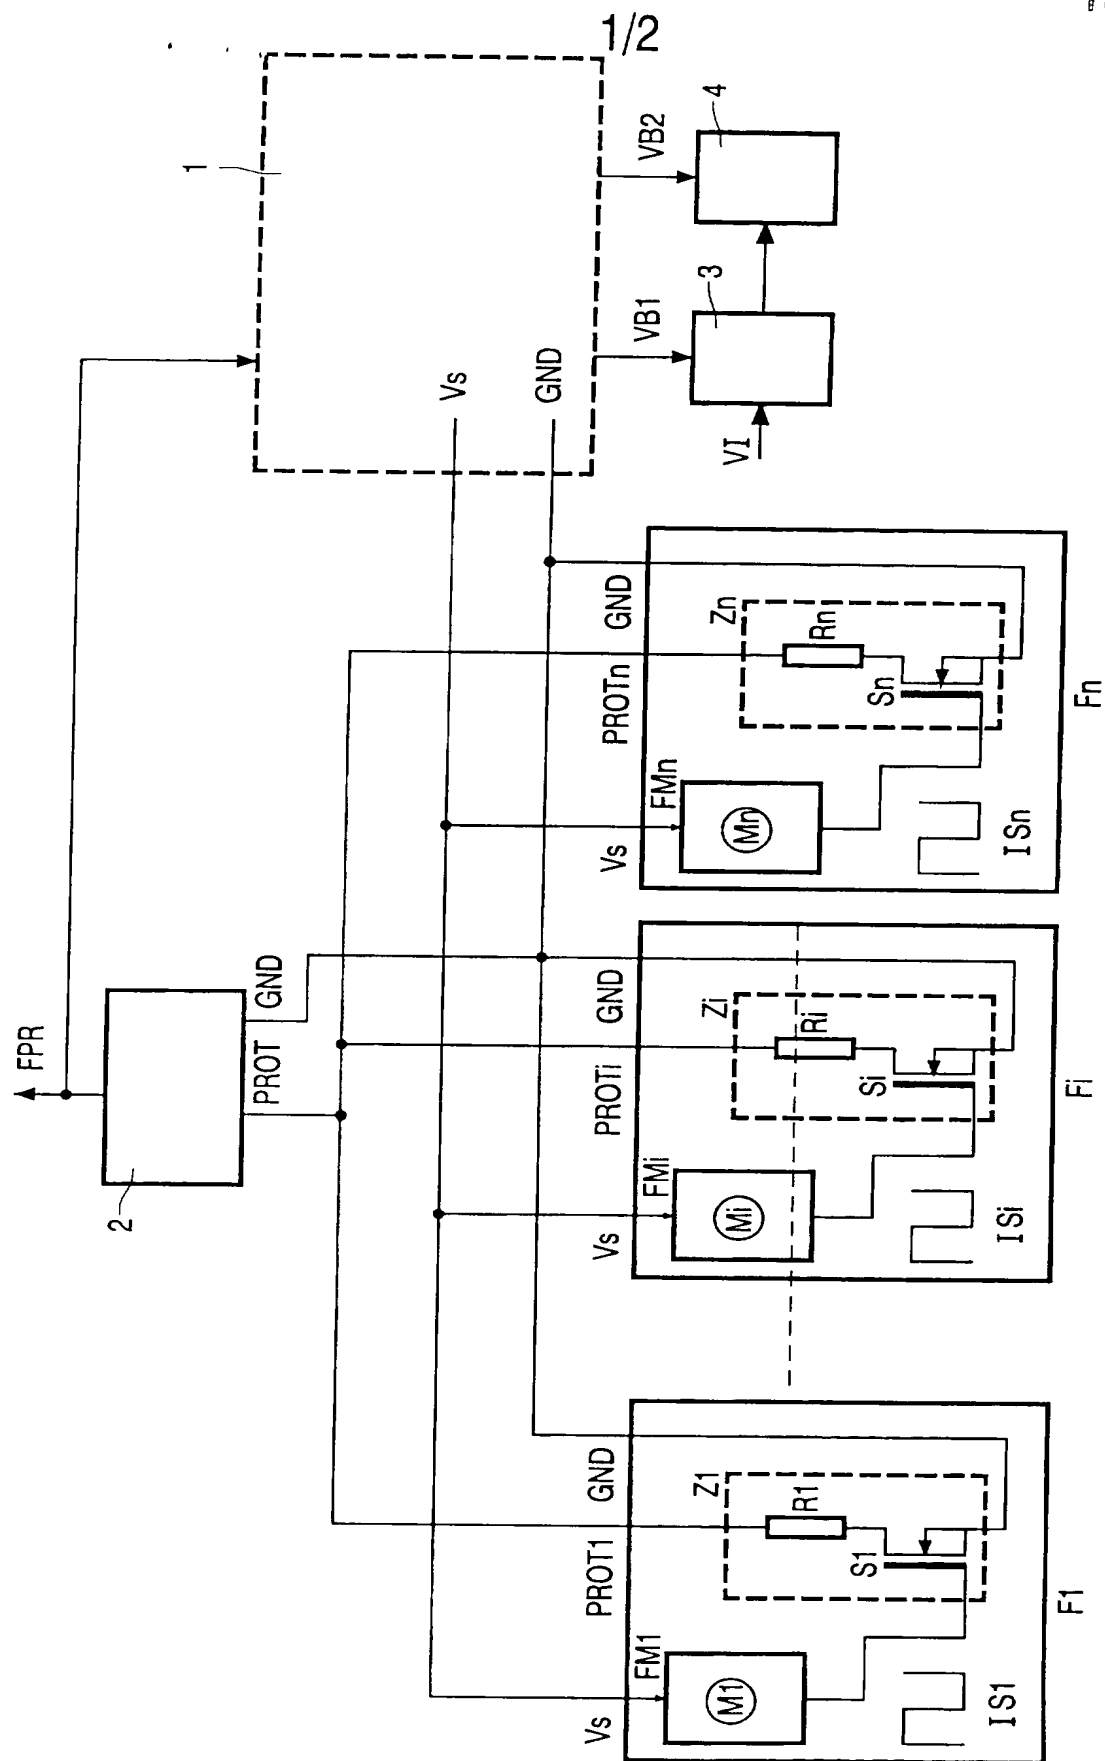


FIG. 1

2/2

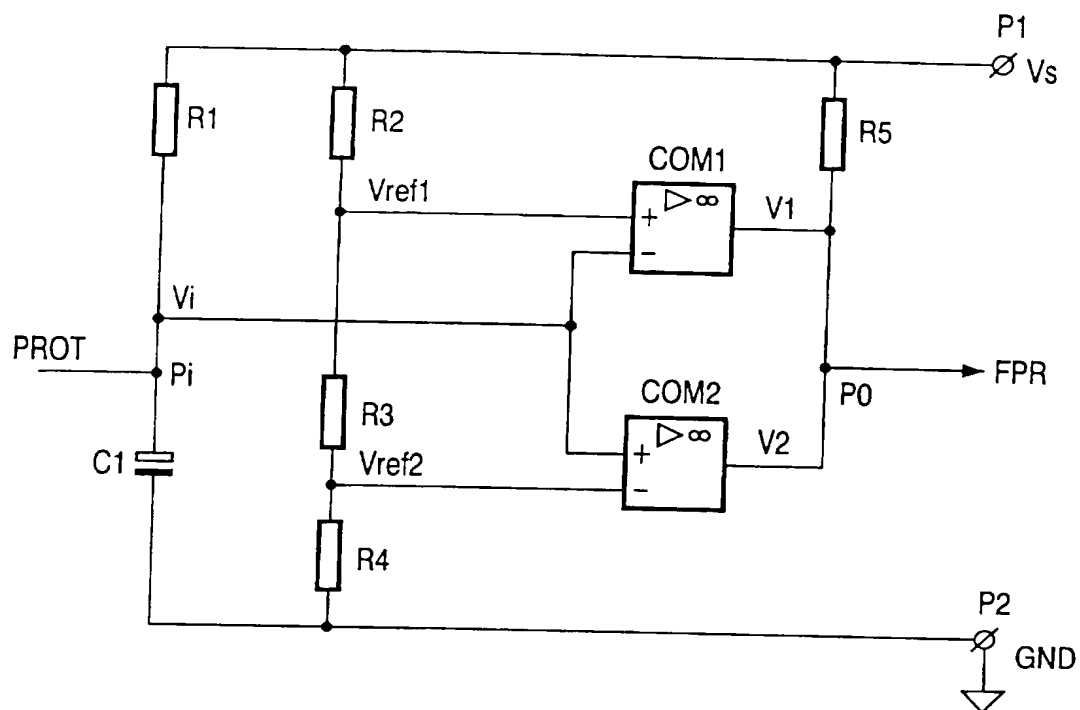


FIG. 2

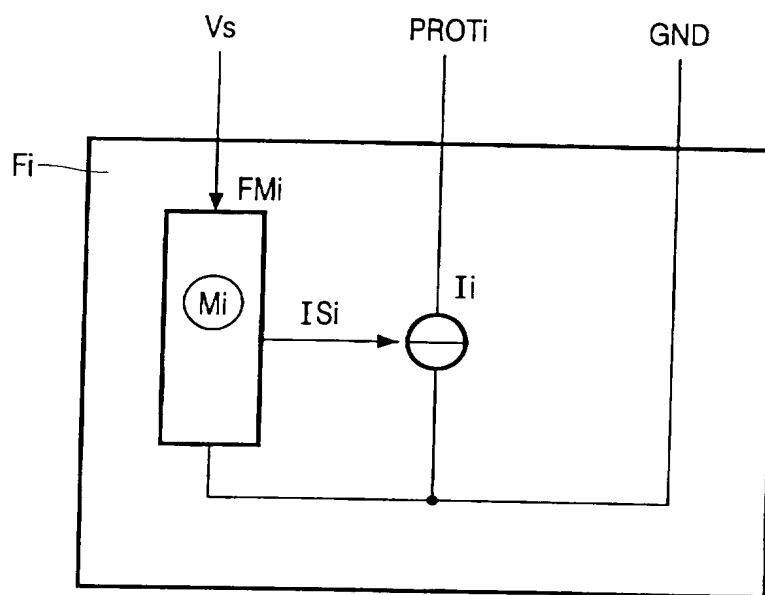


FIG. 3